

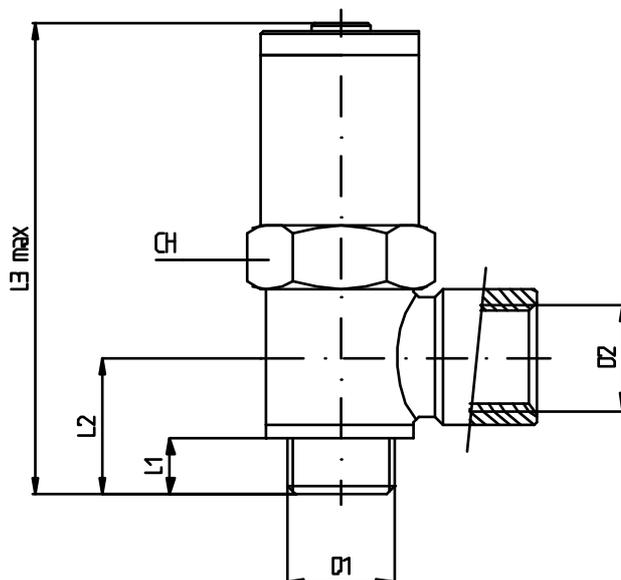


MV 50

Avviatore progressivo

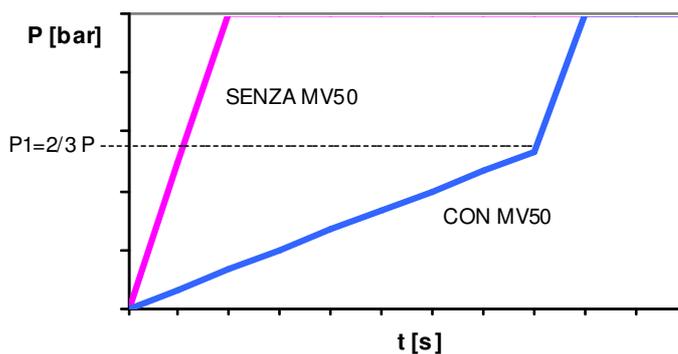

- Pressione di lavoro (P1): 3 ÷ 10 bar
- Pressione di apertura totale: 2/3 P1
- Portata: MV 50 1/4 → 1800 Nl/min (6 bar)
MV 50 3/8 → 2400 Nl/min (6 bar)
MV 50 1/2 → 2900 Nl/min (6 bar)
- Temperatura d'esercizio: 0 ÷ 70 °C
- Materiali costituenti:
 - Corpo del regolatore: Ottone Nichelato UNI EN 12164 CW614;
 - Oring: NBR.



Tipo	D1	D2	L1	L2	L3	CH	gr.
MV 500014	1/4	1/4	6.5	17	66	20	99
MV 500038	3/8	3/8	9	21	71,5	20	130
MV 500012	1/2	1/2	10	24,5	74,5	25	180